



Inkema ABHM Inflatable Dock Shelter ABHM

Energy efficient, aesthetic design and user friendly-all round protection.



TECHNICAL DESCRIPTION

ABHM Inflatable Dock Shelter protect your goods and staff, as the economical blower motor maintains the pressure during loading and unloading process. This helps reduce energy consumption.

ABHM Inflatable Dock Shelter, when deflated the cushions shall retracted nicely behind the protection strips thus not compromising the aesthetics of the building and allowing the driver a clear view during docking.

ABHM Inflatable Dock Shelter is designed for quick installation. If damaged, these parts are easy to replace and repair.

ABHM Inflatable Dock Shelter creates a safe, comfortable, and effective environment to load and unload your goods. Inkema supply a dock shelter for every situation!

Dock Shelters

TECHNICAL FEATURES AND PERFORMANCE

· Nominal height	3700, 4000 mm
· Nominal free height	3300, 3600 mm
· Nominal width	3500 mm
· Nominal free width	2900 mm
· Nominal depth	1020 mm
· Top bag extension	1200 mm (option: 1500 mm)
· Side bag extension	650 mm
· Wall and roof	Insulated panel 40 mm
· Standard RAL colours	RAL 9002 white (wall & roof)
· Fabric quality	70% PVC polyester / 30% Polyamide
· Top bag	500 g/m ²
· Side bags	front 900 g/m ² & rear 500 g/m ²
· Front canvases	PVC 3200 g/m ²


ELECTRICAL PERFORMANCES

· Fan motor	230 V, 1-phase, 50/60 Hz
· Blind motor	230 V, 1-phase, 50/60Hz
· Noise level	<75dB in working position
· Working temperature	-20°C to + 70°C
· Box type and size	Polyester 190 mm x 240 mm x 105 mm
· Protection	IP55 (UNE 20324)
· Impact resistance	IK7 (UNE-EN 50102)
· Control circuit	12 VAC by transformer
· Motor protection	By fuses
· Control circuit protection	Fuse
· Connections	Numbered terminal block on plate

Inkema ABHM Inflatable Dock Shelter is in compliance with **MD 2006/42/EC**


DIMENSIONS*

* Measurement for dock height of 1200 mm

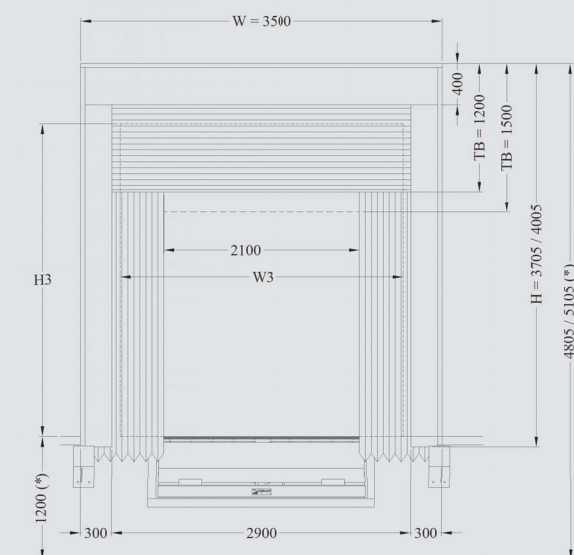


W : Width ABHM, 3500mm
H : Height ABHM, 3705mm/4005mm
TB : Top bag size 1200mm/1500mm

Standard Door Dimensions W3 = 2700, H3 = 3000

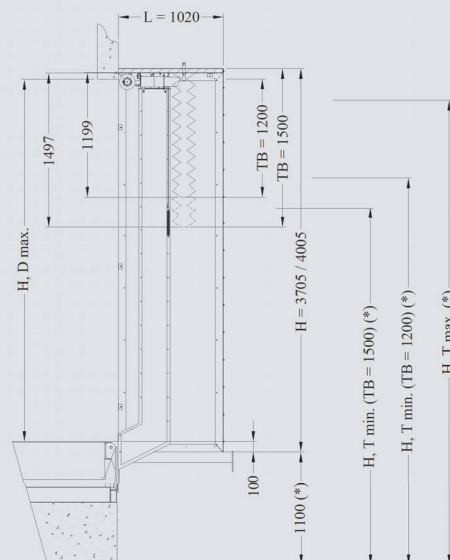

H, D max.: Door max. Height, 3500mm/3800mm (*)
H, T max.: Truck max. Height, 4500mm/4800mm (*)
H, T min.: Truck min. Height, (Top Bag 1500) 3400mm/3700mm (*)
H, T min.: Truck min. Height, (Top Bag 1200) 3700mm/4000mm (*)

OPERATION

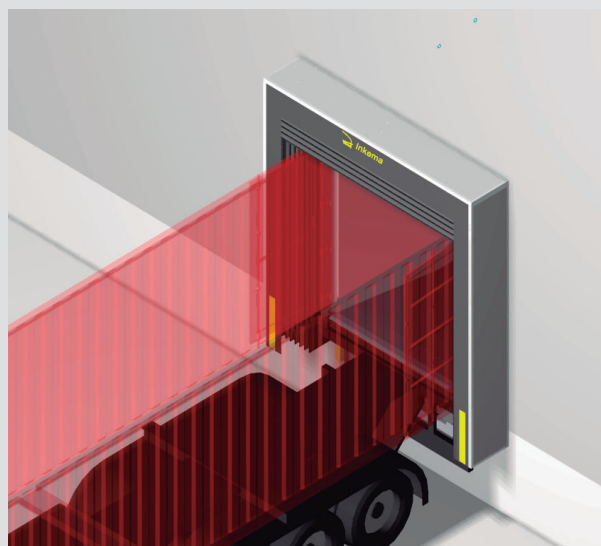

ACCESSORIES

Inkema offers a variety of accessories that allow its customers to customise the loading bays according to their needs and requirements.



Steel-Rubber Bumper - TC05



Reversible Truck Guides - GC01



Automatic Retention System - CS12

Q1.0-2021 - 000885/01

www.inkema.com

Carretera de Cardedeu, C-251, Km. 3 - 08520 Les Franqueses del Vallés - Barcelona - (Spain)
For further information please contact us by phone +34 93 544 47 08 or by email: export@inkema.com